


DECLARATION OF CONFORMITY
Manufacturer: Kiili Betoon LLC

The product has a warranty for 2 years in case of normal usage and correct installation.

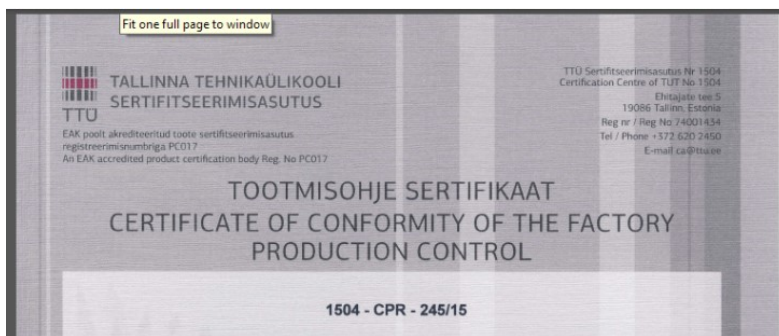

The products of polished concrete have the following qualifications:

1. Compressive strength $N, mm^2 \geq Mpa 35$, standard EVS-EN 12390-3:2009
2. Concrete class C30/37, standard EVS-EN 206-1:2007
3. Frost resistance class S, kg/m^2 KK4 (56 cycles), standard EVS 814:2003
4. Fire resistance class R30
5. Durability $\geq LA 20$
6. Allowable deviations (+/-)mm
length 10 mm
width 10 mm
height 5 mm

The composite mixture used in producing slabs of polished concrete has a fixed consistency that corresponds to the rules of the mixing procedure. The concrete mix is blended in the liquidizer using the following raw materials:

1. Limestone rubble – grey, fraction 2-8 mm – the product conforms to the standard documentation EVS-EN 12620; production control certificate No. 0416-CPD-0013/SFS
2. Sand – quartz, fraction 0/4 – the product conforms to the standard documentation EVS EN 12620:2003; production control certificate No. 1403-CPD-0001
3. Portland cement – grey, CEM 142,5 – the product conforms to the standard documentation EVS-EN 197-1:2002; EU-certificate of conformity No. 1504-CPD-022/05

Amplification – mark: BSt 500M – quality certificate No. 306 DIN EN 10204:2005-01.

Kiili Betoon LLC

Vaela, Kiili Parish 75401, Harjumaa, Estonia

Phone: +372 6725591

E-mail: info@kiilibetoon.ee